


R系列磁力瓦参数表
The parameter table of R series magnetic wheel(NdFeB)

Magnetic wheel with Ndfeb magnet, stainless steel surrounding edge.

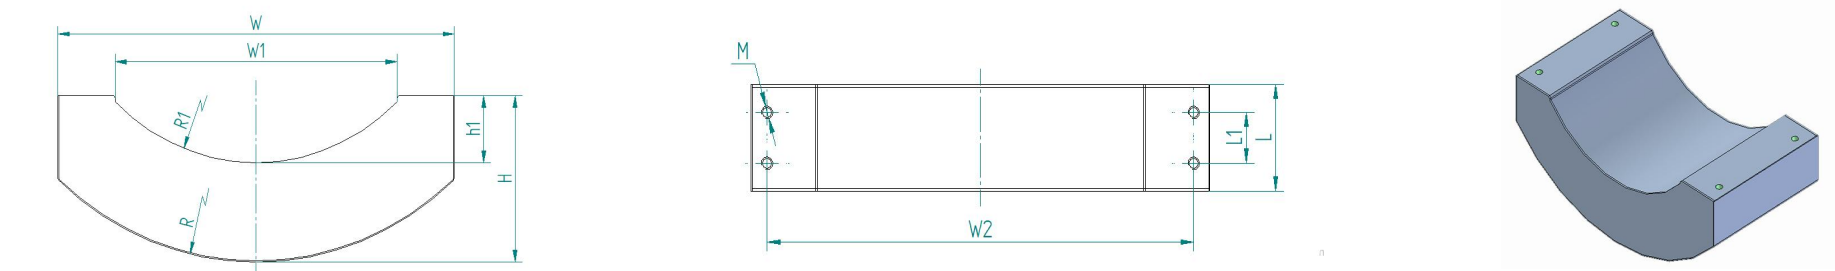

NO. 型号	R(mm)	长L (mm)	宽W (mm)	高H (mm)	W1 (mm)	H1(mm)	R1	M	W2	L1	距离10mm厚钢板吸附力(N)			重量 Weight(kgs)
											0mm	3mm	5mm	
FZR5040	50	40	76	36.5	42	12.5	26	M4	64	18	490	230	150	0.55
FZR5060	50	60	76	36.5	42	12.5	26	M4	64	38	820	400	260	0.83
FZR5080	50	80	76	36.5	42	12.5	26	M4	64	58	1150	570	380	1.10
FZR8040	80	40	115	51	76	20	49	M5	102	18	730	400	300	1.15
FZR8060	80	60	115	51	76	20	49	M5	102	38	1250	730	540	1.68
FZR8080	80	80	115	51	76	20	49	M5	102	58	1750	1050	800	2.20
FZR10040	100	40	152	62	100	26	64	M5	138	18	850	480	340	1.75
FZR10060	100	60	152	62	100	26	64	M5	138	38	1500	900	650	2.55
FZR10080	100	80	152	62	100	26	64	M5	138	58	2150	1300	950	3.40
FZR100100	100	100	152	62	100	26	64	M5	138	78	2800	1700	1250	4.25
FZR12040	120	40	172	70	120	30	80	M5	158	18	1000	600	420	2.25
FZR12060	120	60	172	70	120	30	80	M5	158	38	1750	1100	800	3.28
FZR12080	120	80	172	70	120	30	80	M5	158	58	2500	1600	1200	4.32
FZR120100	120	100	172	70	120	30	80	M5	158	78	3250	2100	1600	5.35
FZR15040	150	40	200	77	142	31	104	M6	186	18	1200	750	560	2.95
FZR15060	150	60	200	77	142	31	104	M6	186	38	2100	1350	1050	4.25
FZR15080	150	80	200	77	142	31	104	M6	186	58	3000	2000	1550	5.65
FZR150100	150	100	200	77	142	31	104	M6	186	78	3950	2550	2050	7.10
FZR150120	150	120	200	77	142	31	104	M6	186	98	4850	3250	2550	8.40

The forces have been determined at room temperature on a plate in polished steel (\$235JR according to DIN 10 025) with a thickness of 10 mm (1kg ~ 10N). Under normal test condition, the measured force is not lower than the specified value. Value is exceeded in general. Depending on the type of application (installation situation, temperatures, counter anchor etc.) the forces can be influenced enormously. The indicated values are serving as an orientation. Please get advice and help from our experts